


# SILENCE HAS MORE SPACE

Door, jambs and gaskets for sound insulation.  
ECLISSE ACOUSTIC is an integrated system with high soundproof performances designed specifically to reduce the noise between rooms.  
All the advantages of a sliding pocket door system associated with the acoustic comfort.

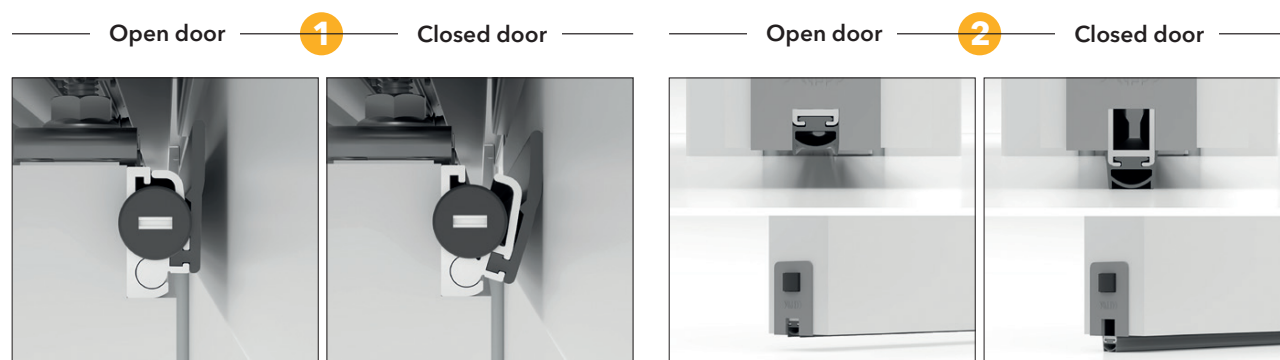

### Upper weatherstrip

Inserted into the upper milling of the door panel, it opens when the door closes.  
The high quality materials allows to preserve over time the original acoustic performance.

### Lower weatherstrip

Inserted in the lower milling of the door panel, it rises and falls at every opening and closing of the door.  
The rounded and flexible shape wraps the draughts accurately while the high quality materials allows to preserve over time the original acoustic performance.

## REFERENCE NORMS

### Noise abatement 38 dB (-1; -3)

Test performed on a 890x2030 mm frame, installed to perfection, equipped with blind shell lock.


### Reference norms

UNI EN ISO 10140 - 2 Laboratory measurement of sound insulation in buildings and building elements - Part 2: Measurement of acoustic insulation by air.  
UNI EN ISO 717 - 1 Evaluation of sound insulation in buildings and building elements - Part 1: Sound insulation by air.



**5 Door panel**  
The special stratigraphy of the door guarantees a high soundproofing performance. The acoustic sliding panel is 40 mm thick and is supplied as standard already set for the installation of accessories. The door is available in raw walnut Tanganyika and in lacquered RAL colours.

**6 Jambs and Architraves**  
The acoustic jambs are already milled and ready for the installation of the acoustic gaskets.

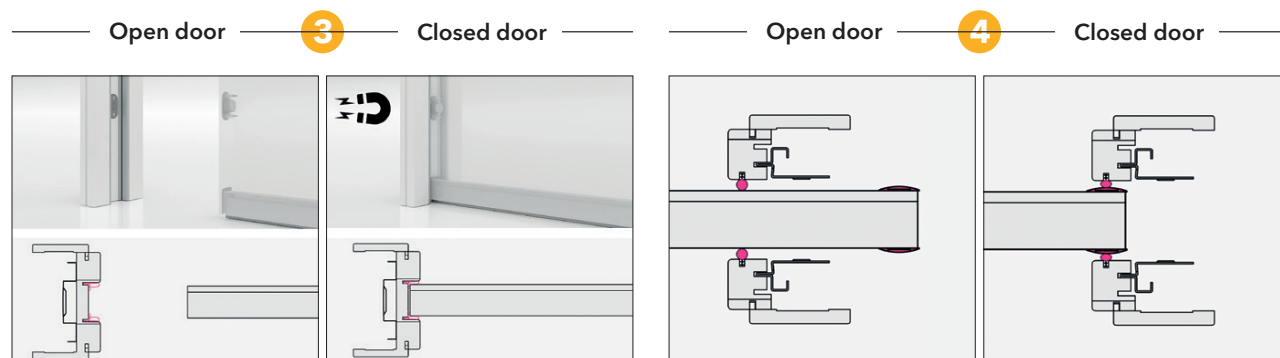

### Magnets

Magnets are positioned on the door panel thickness and, at the same height, on the stop jamb upon which it closes. They keep the door perfectly closed, maintaining the total adhesion between the two surfaces.

### Acoustic gaskets and bumps

Installed on the door and the jambs, they seal the vertical interstices, closing all the draughts between the door and the jambs on the side of the pocket. They are available in black and white colours.

## AVAILABLE TYPES DIMENSIONS AND ACCESSORIES


### Compatible sliding pocket door systems

ECLISSE ACOUSTIC can be installed on both solid and stud wall versions of ECLISSE SINGLE models with finished wall thickness of 125 and 150 mm, ECLISSE LUCE SINGLE and ECLISSE EWOLUTO® SINGLE, also if already mounted. Compatible widths goes from 600 to 1000 mm, compatible heights from 2000 to 2400 mm.


### Compatible accessories

ECLISSE BIAS®  
ECLISSE BIAS® DS


**ECLISSE SINGLE** - Finished wall thickness 108/125/150 mm

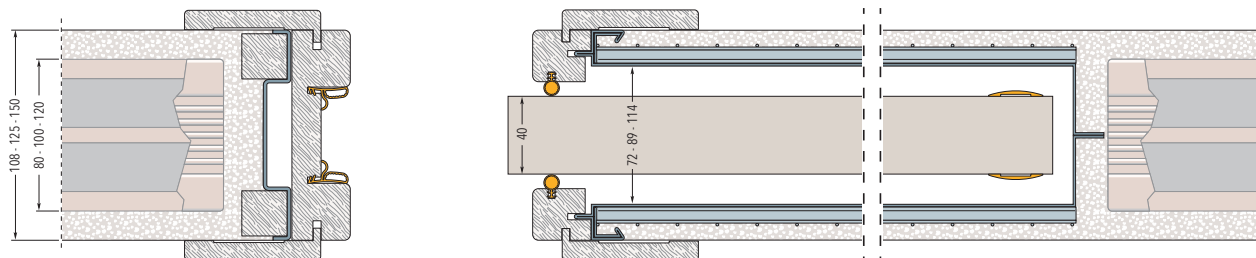

**ECLISSE LUCE SINGLE** - Finished wall thickness 150 mm

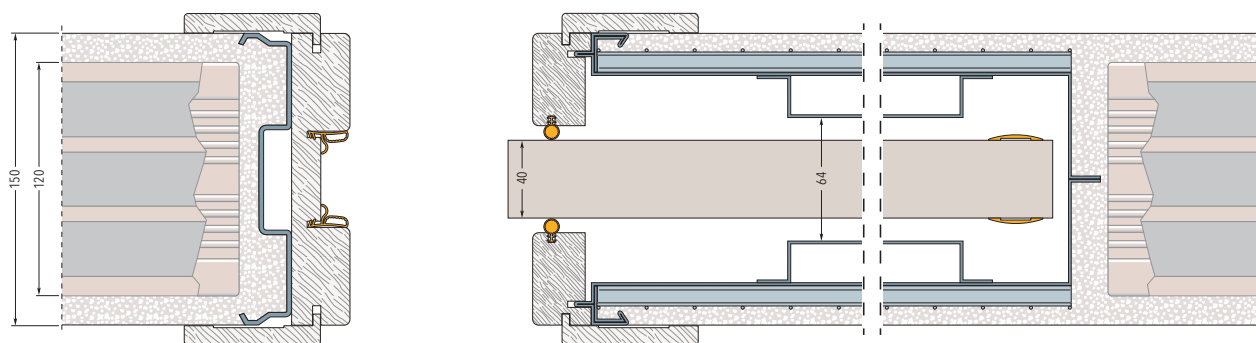


**ECLISSE EWOLUTO® SINGLE** - Finished wall thickness 150 mm

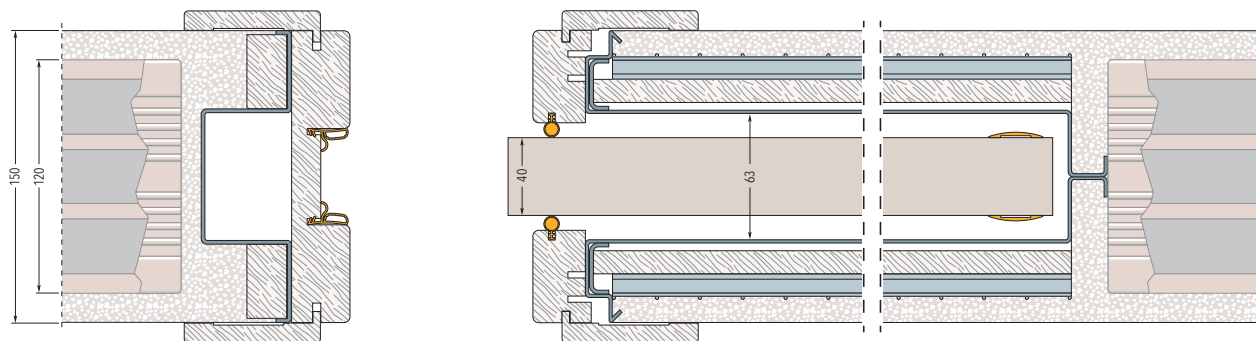





**ECLISSE SINGLE** with one plasterboard layer - Finished wall thickness 125 mm

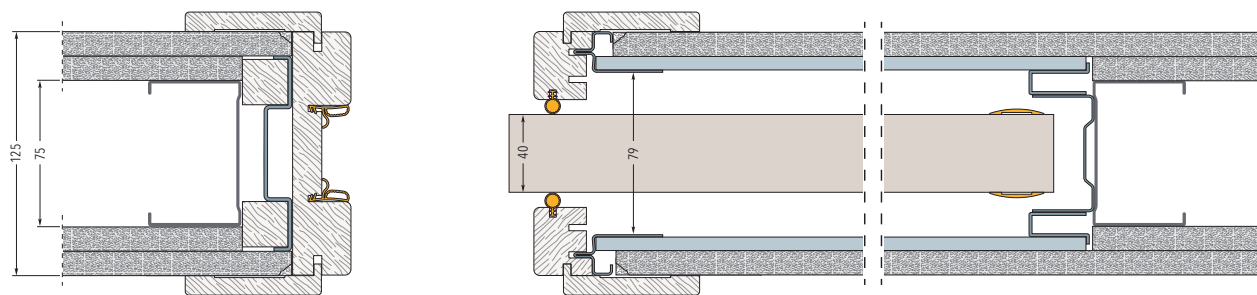

**ECLISSE SINGLE** with two plasterboard layers - Finished wall thickness 125 mm

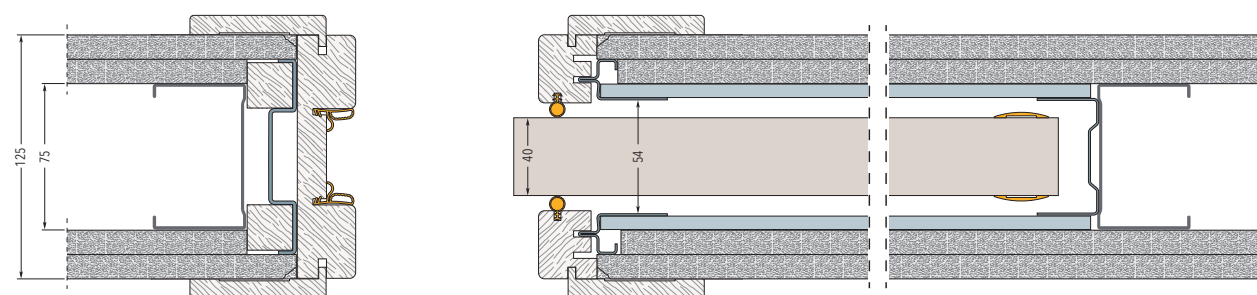

**ECLISSE SINGLE** with two plasterboard layers - Finished wall thickness 150 mm

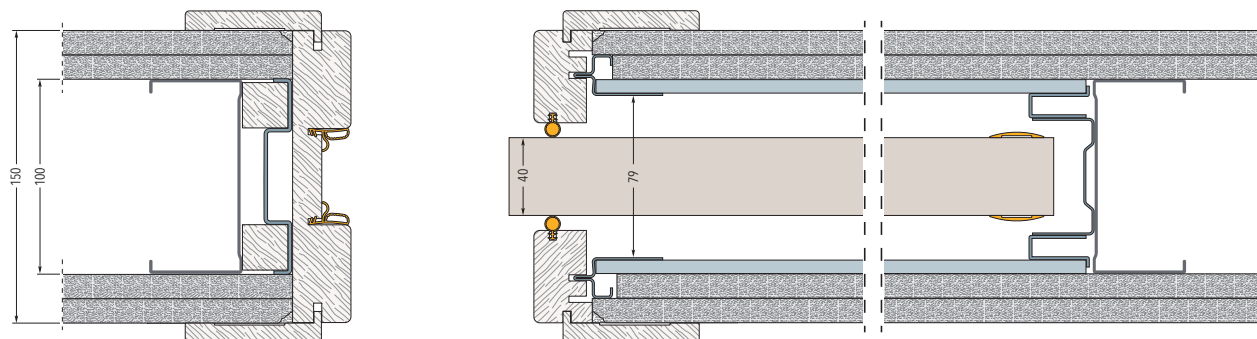

**ECLISSE LUCE SINGLE** with one plasterboard layer - Finished wall thickness 150 mm

